
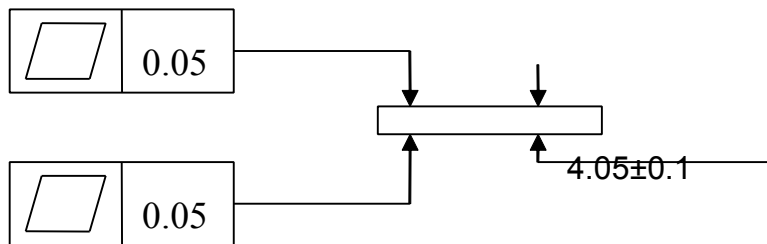


TEC1-12703

DIMENSION:

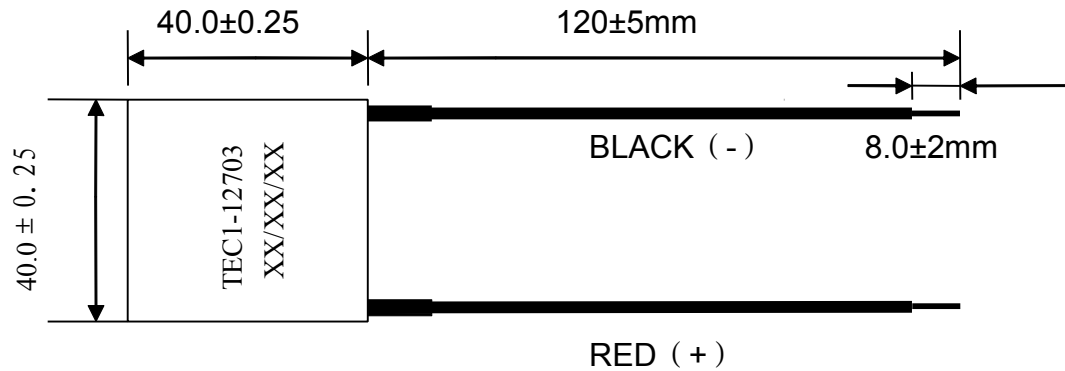

More details:

1. Temp. Range: -55°C to $+80^{\circ}\text{C}$
2. Torque: 150 pound/square inch
3. 127 Couples
4. I_{max} (A): at 15.2VDC 3A
5. U_{max} (V): 15.2VDC
6. Maximum output power of the cold: 29.7 W (15.2VDC)
7. Power Input= 45W (at 15.2VDC) approximate
8. ΔT_{max} ($^{\circ}\text{C}$) $Q_{\text{c}}=0$ $T_{\text{max}} \geq 62^{\circ}\text{C}$
9. Working life-time: more than 40K hours.
10. Resistance: At Temperature 20°C , 1KHZ Vacuum, 2.10-2.35 Ω
11. Wires specification: 20AWG, UL 1674, 105°C , Standard tin-plated copper lead, PVC Insulation, wire length: $120 \pm 5\text{mm}$, Wire strip length: $8.0 \pm 2\text{mm}$

